




REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

**Technical characteristics:**

- Specifications**  
 DIN EN 60 664  
 DIN EN 61 984
- Inserts**
01. Number of contacts :17
  02. Rated Current :10A
  03. Rated Voltage :160V
  04. Pollution degree :3
  05. Rated impulse voltage :2.5kV<sub>u</sub>
  06. Insulation resistance :≥10Ω
  07. Material:Polycarbonate
  08. Rated voltage acc. to UL/CSA:250V
  09. Limiting temperatures : -40℃~+125℃
  10. Flammability acc. to UL94:V0
  11. Mechanical working life (mating cycles) : ≥500

- Contacts**
01. Material:Copper alloy
  02. Surface:hard-gold/silver plated
  03. Contact resistance :≤3mΩ
  04. Terminal :Crimp terminal
  05. Wire gauge :0.14-2.5mm<sup>2</sup> (AWG 26-14)
  06. Rohs Compliance

Note:Crimp contact pins should order separately

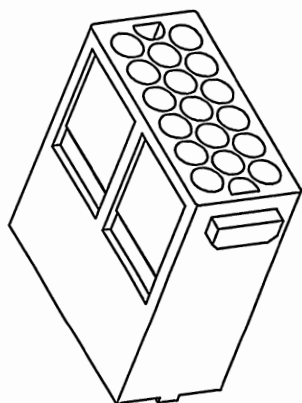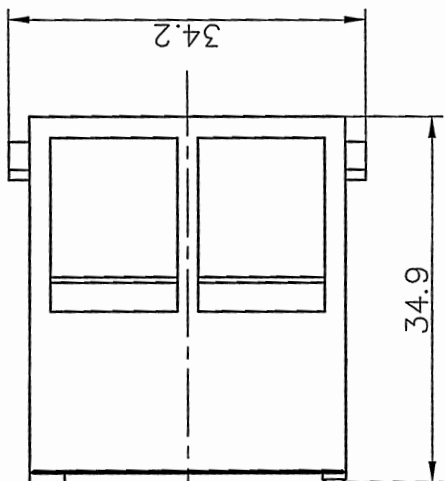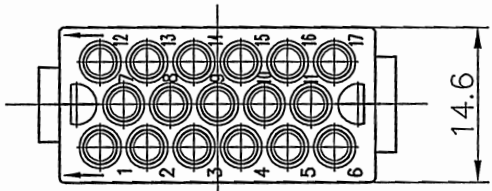

PART NO: /	DEGSON® 宁波高松电子有限公司
APPD: HYS 2016.9.27	NINGBO DEGSON ELECTRICAL CO., LTD
CHKD: Jym 2016.9.28	NAME: DMD-017-MC
DRFT: yang 2016.08.22	TITLE: CUSTOMER DRAWING
THIRD ANGLE PROJECTION	REV DO-1
MM (INCH)	SHEET 1/1
DO NOT SCALE DRAWING	SCALE 1.5:1