
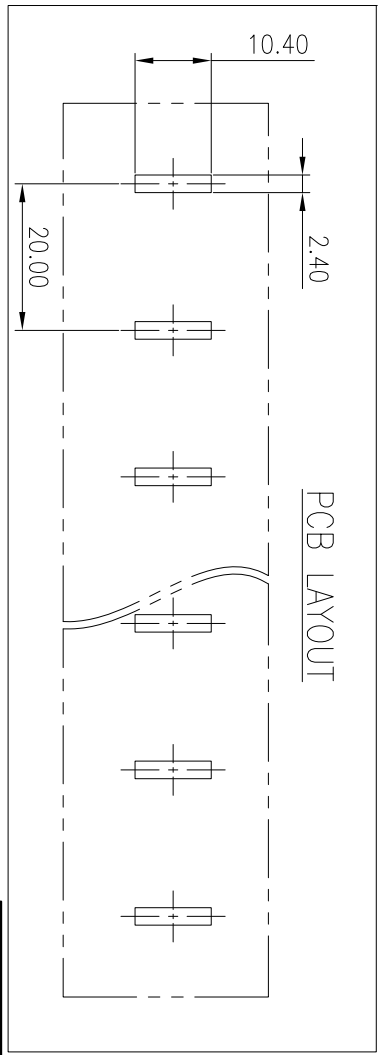


Pitch Range In mm		Nominal Dimension Range In mm				Pitch Range In mm	
Over	Over	Over	Over	Over	Over	Over	Over
6	10	10	24	30	60	100	150
T0	T0	T0	T0	T0	T0	T0	T0
6	10	24	30	60	100	150	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30
							±2°

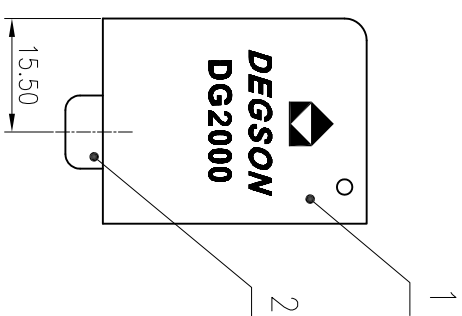

PCB LAYOUT

5	Cover	PC	UL94 V-2
4	Nut	Steel	Ni Plated
3	Screw	Steel	Ni Plated
2	Pin Header	Copper Alloy	Ni Plated
1	Housing	PBT	UL94 V-0

ITEM NAME OF PART MATERIAL NOTES

UL 标准/UL Standard: B C D

额定电压/电流/Rated Voltage(V)/Current(A) 600/75 600/75 600/75

额定扭矩/Torque Tightening(N·m/Lb·in) M6, 2.5/22.15

线径范围(铜线)/Wire Range(flexible)(AWG) 26~4

可焊长度/Stripping length(mm) 20.00/N=02~12P

使用温度范围/Operating temperature(°C) -40~+120

符合RoHS环保要求/Conform to RoHS Yes

MATERIAL: / SURFACE: /

NAME: **DEGSON**® NINGBO DEGSON ELECTRICAL CO., LTD
 宁波高松电子有限公司

DRAWING NO.: DG2000-B-C01

TYPE: CUSTOMER DRAWING

SCALE: 1:1

REV: TO

1/1 SHEET

DRFT: Yujin 10/10/14" SIZE: A4

CHKD: /

APPD: /

STATUS: /

MAT NO.: /

REV	ECN	DESCRIPTION	DRFT	DATE

D C B A

1 2 3 4 5 6