
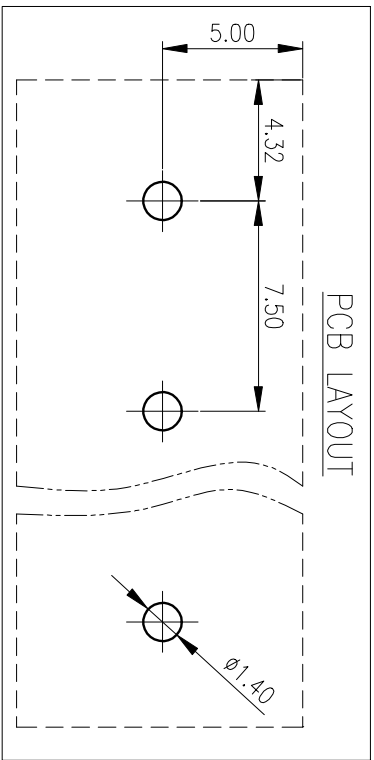
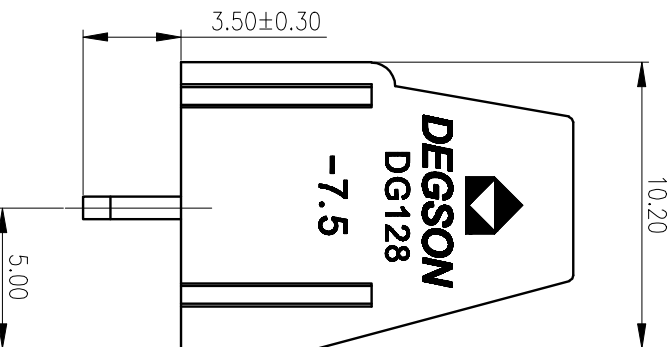
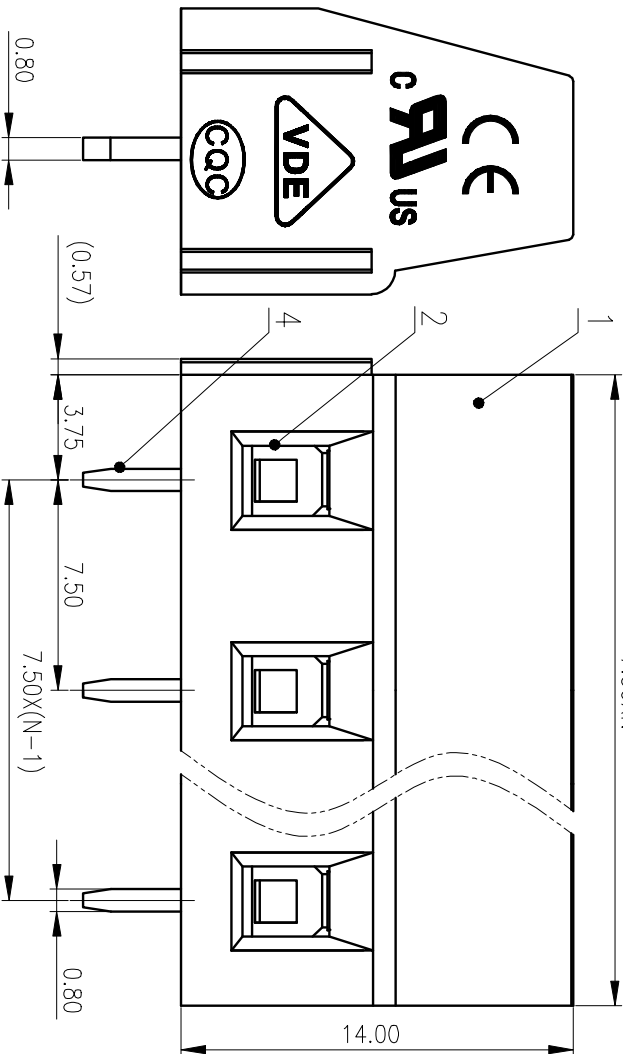


公差等级/General	Tolerances(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
±0.12	+0.18	±0.22	+0.26	+0.31	±0.37	+0.57	+0.80	+0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2.50	±Z	±Z

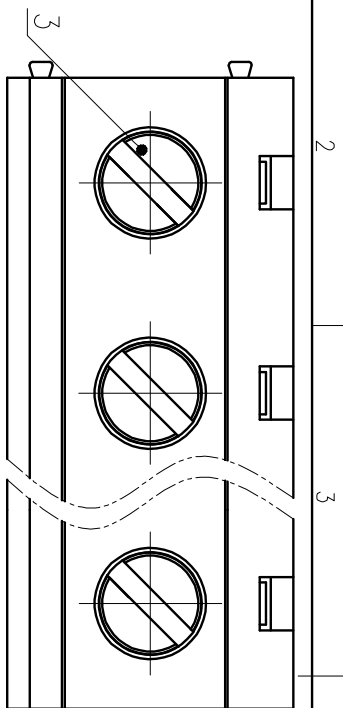

4	Pin Header	Copper Alloy	Sn Plated
3	Screw	Steel	M2.5/Zn Plated
2	Cage	Copper Alloy	M2.5/Ni Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/20	/	300/70
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级	III/3	III/2	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	/	400/18	/
工频耐压/Withstanding Voltage(V/Min)	/	AC2500	/
拧紧扭矩/Torque Tightening(N·m/Lb.in)	M2.5: 0.4/3.54		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	1.0~2.5/30~12		
剥线长度/Stripping length(mm)	7.5/N=02~16P		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS要求/Conform to RoHS	Yes		

MATERIAL:	/
MAT NO.:	/
STATUS:	/
APPD: LiGL	2020.06.11
CHKD: Mek	2020.06.11
DRT: LuoXM	2020.06.11
NAME:	NINGBO DEGSON ELECTRICAL CO., LTD
DRAWING NO.:	DG128-7.5-C02
TYPE:	CUSTOMER DRAWING
SCALE:	4:1
REV	T1
SHEET	1/1

REV	ECN	DESCRIPTION	DRT	DATE