
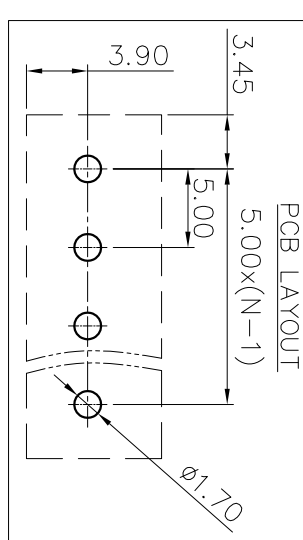

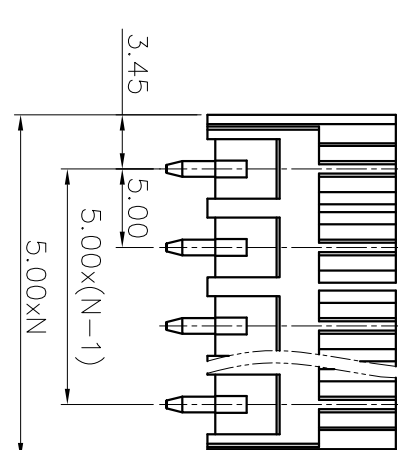

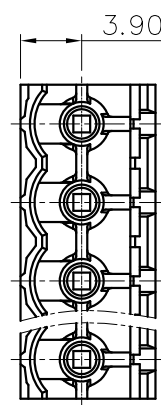



公差/General tolerances(mm)		0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2.50	±2.50	±Z

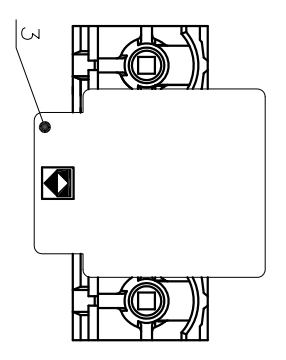

3	Cap	Thermoplastic	UL94V-0
2	Pin	Copper	Sn plated
1	Housing	LCP	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard: B C D			
额定电压/电流/Rated Voltage(V)/Current(A) 300/15 / 300/10			
EC 标准/IEC Standard: 300/15 / 300/10			
过压类别/Overvoltage Category/污染等级 III/3 III/2 II/2			
额定电压/电流/Rated Voltage(V)/Current(A) / 320/20 /			
额定脉冲电压(KV)/Rate Impulse Voltage(KV) / 4 /			
间距/Pitch(mm)/线数范围/Poles 5.0/N=02~12P			
使用温度范围/Operating temperature(°C) -40~+130			
符合RoHS环保要求/Conform to RoHS Yes			

MATERIAL:	SURFACE: /
MAT NO.:	/
STATUS:	/
APPD:	NAME: DEGSON 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD
CHKD:	DRAWING NO.: 2EDGV-THR-5.0-C01
DRTI: CenX 2020.06.17	TYPE: CUSTOMER DRAWING

REV	ECON	DESCRIPTION	DRTI	DATE	SIZE: A4	SCALE: 2:1	REV
							DO-1
							1/2