

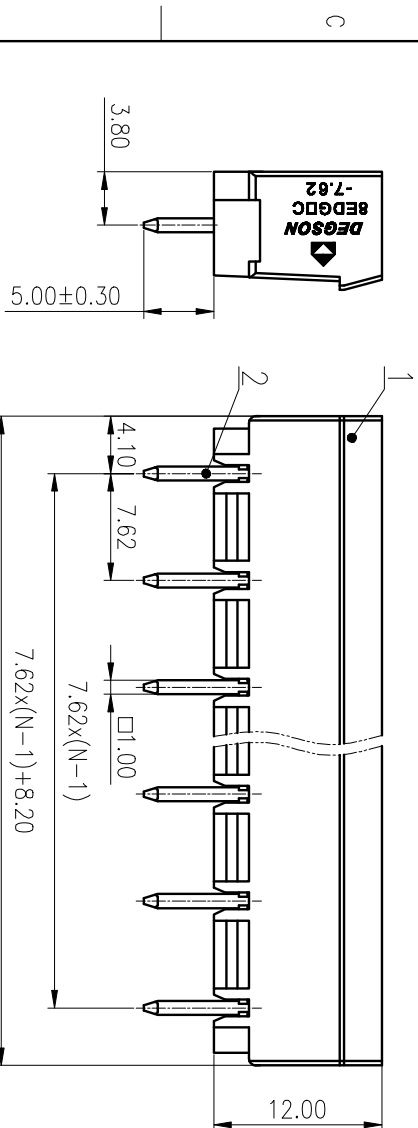
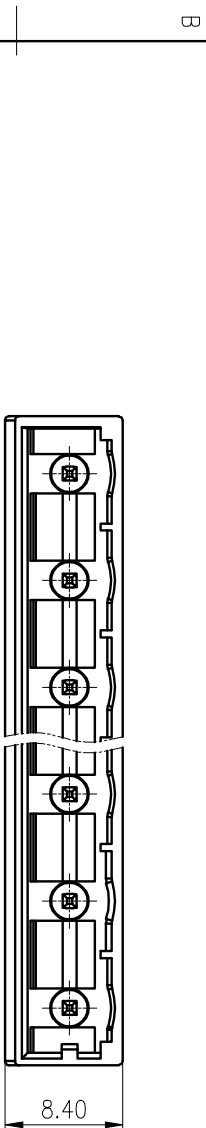


PCB LAYOUT

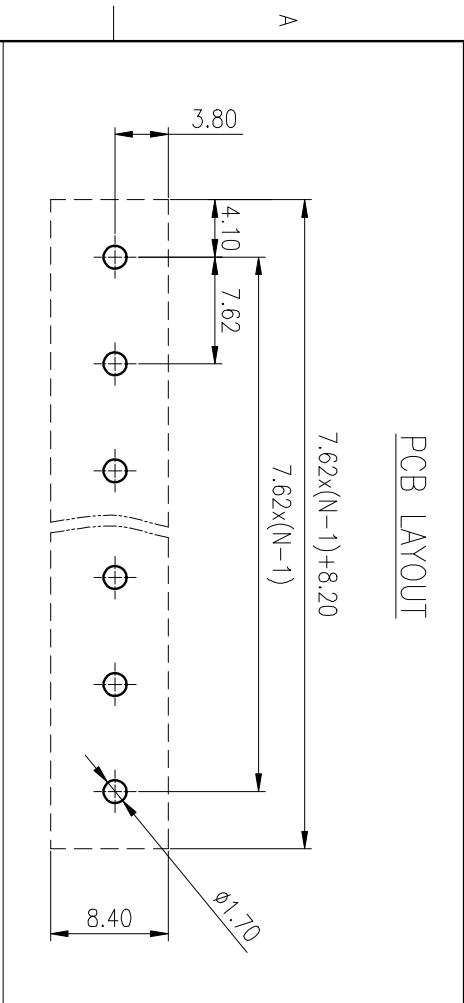

精度等级/General Tolerances(mm)												0.1/1/10													
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>280	>315	>400	±Z												
~	~	~	~	~	~	~	~	~	~	~	~	>500													
3	6	10	18	30	50	80	120	180	280	315	400	500													
±0.12		±0.18		±0.22		±0.26		±0.31		±0.37		±0.57		±0.80		±1.05		±1.15		±1.60		±2.20		±2.50	

MATERIAL:	/	SURFACE:	/
MAT NO.:	/		
STATUS:	/		
APPD:			
CHKD:			
DRT: Y/NDK	2020.03.25	DRAWING NO.:	10001542
TYPE:	CUSTOMER DRAWING	SCALE:	2:1
REV	ECN	DESCRIPTION	DRT
REV	ECN	DESCRIPTION	DATE
REV	ECN	DESCRIPTION	DATE

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Pin header	Copper	Sn Plated

UL 标准 /UL Standard: B C D
 额定电压/电涌 /Rated Voltage(V)/Current(A) 300/15/300/15/300/10
 EEC 标准 /IEC Standard:
 过压类别/Overvoltage Category/污染等级 III/3 /
 额定电压/电涌 /Rated Voltage(V)/Current(A) 400/20 /
 额定脉冲电压(KV)/Rate Impulse Voltage(KV) 4 /
 额定冲击电压(KV)/Rate Impulse Voltage(KV) 7.62/N=02~12P /
 使用温度范围 /Operating Temperature(°C) -40~+105
 符合RoHS要求 /Conform to RoHS Yes
 标准颜色编号 /Standard color number: PANTONE 7534U
 PANTONE /RAL

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
 宁波高松电子有限公司

NAME: 8EDGVC-7.62-XXP-11-01A(H)