


公差表/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~
3	6	10	18	30	50	80	120	180	250	315	400	500	±2
±0.12	±0.18	±0.22	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2

UL 标准/UL Standard:

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/15	/	300/10
过压类别/Overvoltage Category/污染等	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	400/20	400/20	1000/20
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	4	4	4
可距/Pitch(mm)/线数范围/Poles	7.62/N=02~16P		4
使用温度范围/Operating Temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:			
PANTONE / RAL			

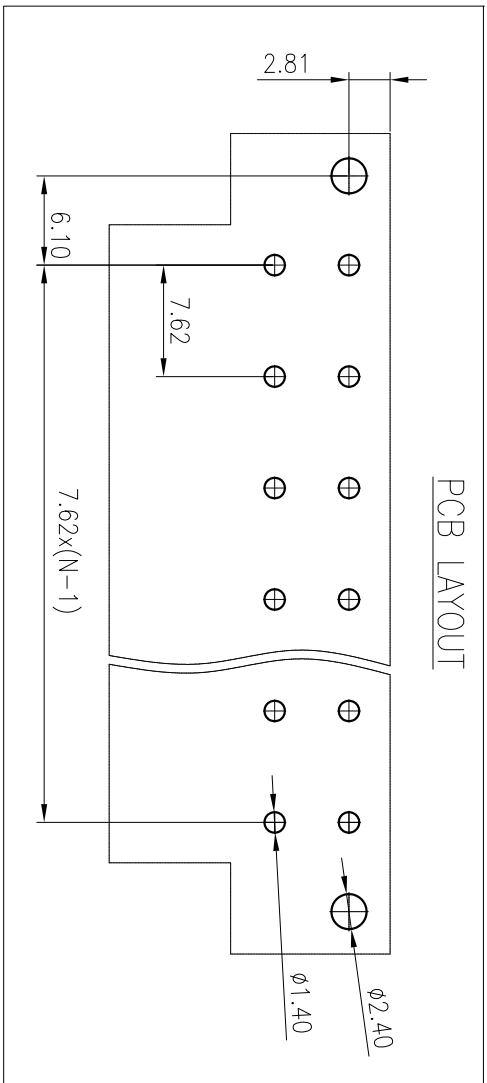

MATERIAL:	/
MAT NO.:	/
STATUS:	/
APPD: LIGL	2020.06.17
CHKD: MGOJ	2020.06.17
DRAFT: WangY2	2020.06.17
NAME:	ZEDGAM-7.62-XXP-14-00A(H)
DRAWING NO.:	ZEDGAM-7.62-C01
TYPE:	CUSTOMER DRAWING
SCALE:	2:1
SHEET	1/1

ITEM	NAME OF PART	MATERIAL	NOTES
4	Screw Cap	Copper alloy	
3	Clamp	Copper alloy	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

PCB LAYOUT

REV	ECN	DESCRIPTION	DRAFT	DATE

SIZE: A4	mm	inch

D C B A

1 2 3 4

5 6

D C B A

D C B A