
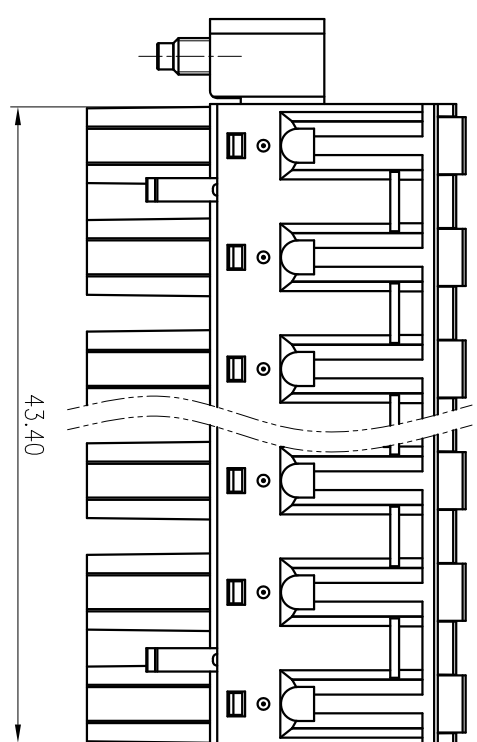
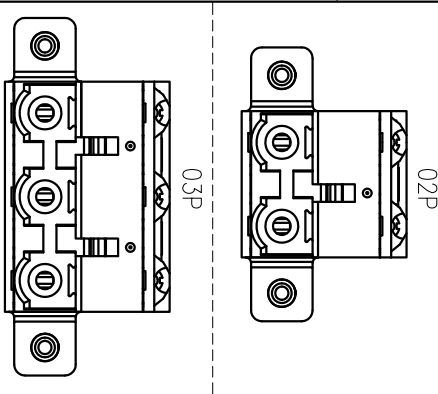
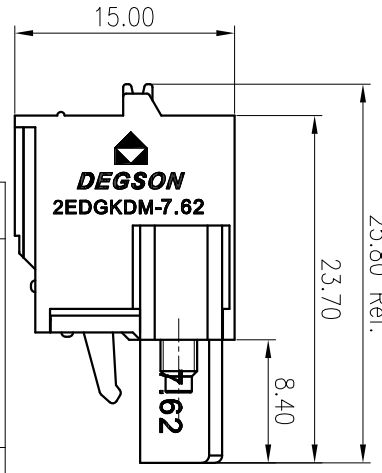


表注公差/General tolerances(mm)													
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/1.0
~	~	~	~	~	~	~	~	~	~	~	~	~	±2
3	6	10	18	30	50	80	120	180	250	315	400	500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.09	±1.15	±1.60	±2.20	±2.50

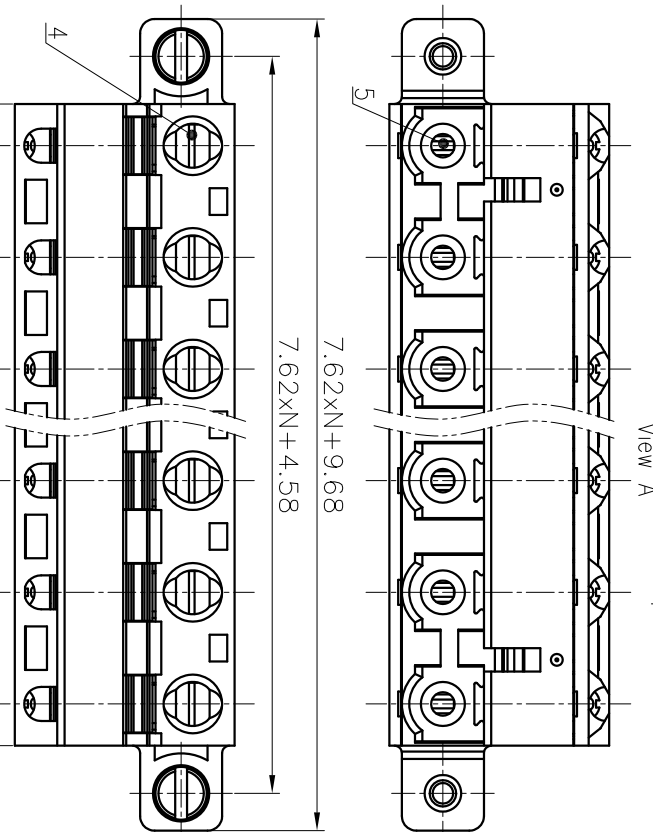

6	Screw	Steel	M2.5/Zn Plated
5	Spring	Stainless steel	/
4	Clamp	Copper alloy	Sn Plated
3	Button	PA66	UL94V-0
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard: B C D			
额定电压/电流/Rated Voltage(V)/Current(A) 300/10 / 300/10			
IEC 标准/IEC Standard: B C D			
过压类别/Overvoltage Category/污染等级 III/3 III/2 II/2			
级/Pollution Degree III/3 III/2 II/2			
额定电压/电流/Rated Voltage(V)/Current(A) 400/20 400/20 1000/20			
额定脉冲电压(KV)/Rate Impulse Voltage(KV) 4 4 4			
额定扭矩/Torque Tightening(N·m/Lb.in) M2.5, 0.4/3.54			
导线范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG) 0.2~2.5/26~12			
间距/Pitch(mm)/线数范围/Poles 7.62/N=02~16P			
剥线长度/Stripping length(mm) 9~10			
使用温度范围/Operating Temperature(°C) -40~+105			
符合RoHS环保要求/Conform to RoHS Yes			
MATERIAL: SURFACE: /			

REV	ECN	DESCRIPTION	DRFT	DATE
1				

MAT NO.:	/
STATUS:	/
APPD:	Li QL 2020.05.23
CHKD:	Md EK 2020.05.23
DRFT:	HuJ 2019.03.09
SIZE:	A4
TYPE:	CUSTOMER DRAWING
SCALE:	2:1
SHEET:	1/1
NAME: DEGSON 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
DRAWING NO.: ZEDGKDM-7.62-C01	
REV	T1