

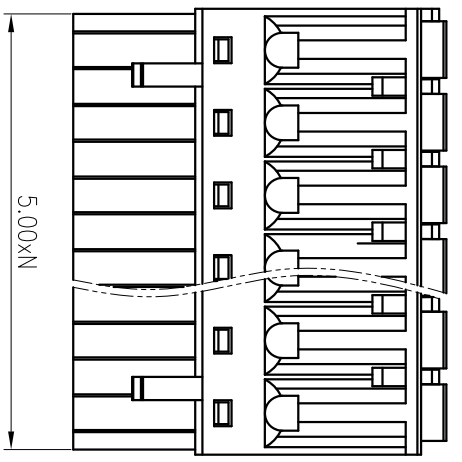
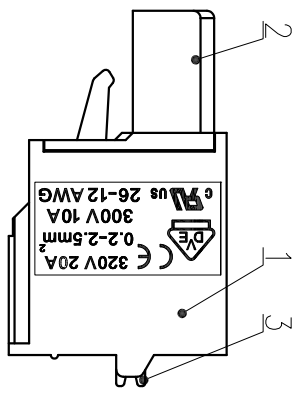
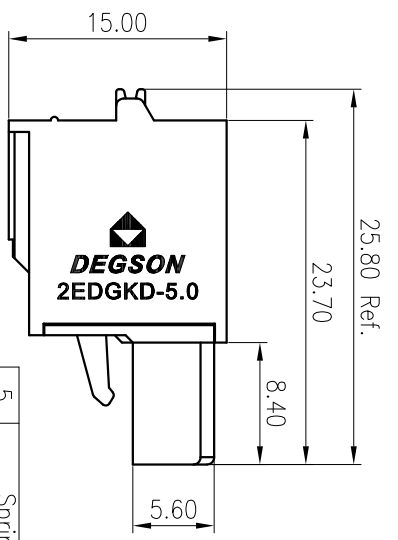
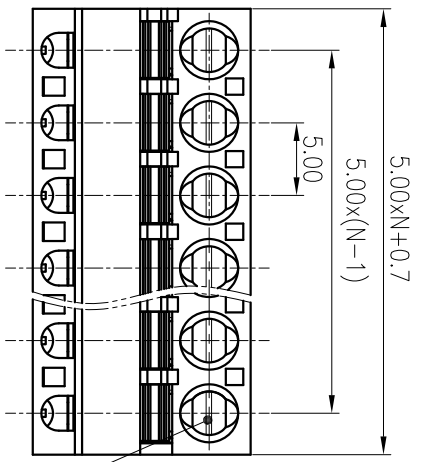


单位/mm / General tolerances(mm)														
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10 ±2	
~	~	~	~	~	~	~	~	~	~	~	~	>500		
3	6	10	18	30	50	80	120	180	250	315	400	500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

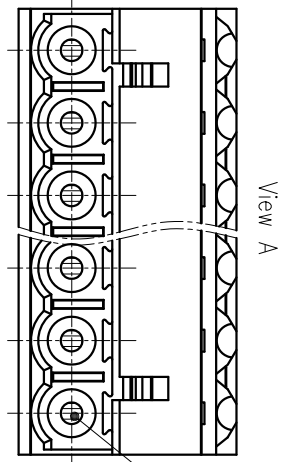

5	Spring	Stainless steel	/
4	Clamp	Copper alloy	Sn Plated
3	Button	PA66	UL94V-0
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
------	--------------	----------	-------

UL 标准/UL Standard:	B	C	D
额定电压/Rated Voltage(V)	300/10	/	300/10
EC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等	III/3	III/2	II/2
级/Pollution Degree	/	/	/
额定电压/电流/Rated Voltage(V)/Current(A)	/	320/20	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	4	/
使用范围(导线和导线)/Wire Range(rigid and flexible)(mm²/AWG)	0.2~2.5/26~12		
间距/Pitch(mm)/线距范围/Poles	5.0/N=02~24P		
剥线长度/Stripping length(mm)	9~10		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL:	SURFACE: /
-----------	------------

MAT NO.:	/
STATUS:	/
APPD: Li GL	2020.05.26
CHKD: Ma EK	2020.05.26
DRFT: Apple	2006.10.20

NAME:	2EDGKD-5.0-XXP-1Y-00A(H)
DRAWING NO.:	2EDGKD-5.0-C01
TYPE:	CUSTOMER DRAWING
SCALE:	2:1
SHEET	1/1

REV	ECN	DESCRIPTION	DRFT	DATE	SIZE	SCALE	SHEET
					A4	2:1	1/1