

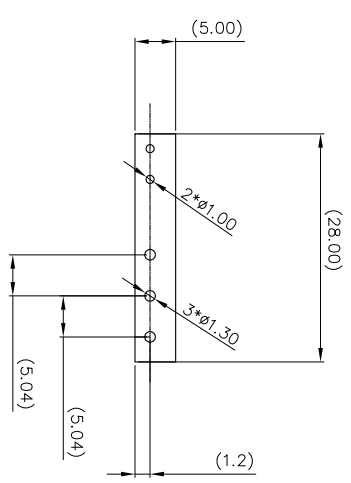


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交流本文件的内容。侵犯者将负赔偿责任。本公司保留对涉及发明、实用新型和外观专利的所有权利。

DRPS-1C

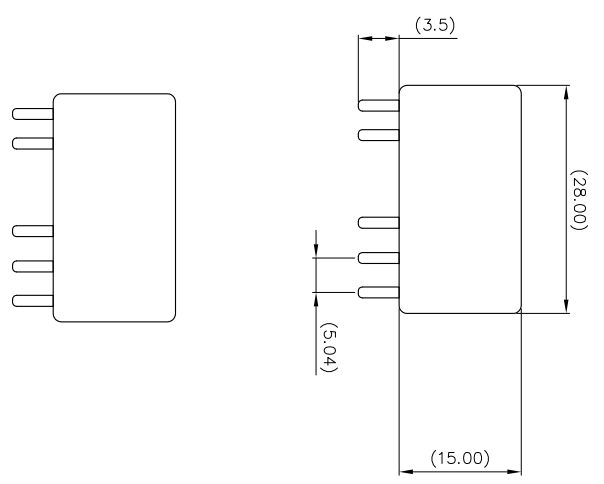

	尺寸公差(mm)			Tolerance
	0	>30	>60	
Load current	~30	~60	~100	0.05/10
Load voltage	~30	~60	~100	±1%
Electrical life	~30	~60	~100	~150
Mechanical life	~30	~60	~100	~150
Contact resistance	~30	~60	~100	≤50mΩ(24V,1A)
Operate voltage	~30	~60	~100	DC: ≥75%Ue
Release voltage	~30	~60	~100	DC: ≥5%Ue
Key controlled symbol	~30	~60	~100	*
Operating temperature(°C)	~30	~60	~100	-25°C ~ +85°C
Dielectric strengths	~30	~60	~100	contacts:1000VAC ,1Min (1mA) Between Coil and contacts:4000VAC ,1Min (1mA)
Coil operating power	~30	~60	~100	0.40W
Max. allowable coil voltage	~30	~60	~100	110%(Ue)

- Conform to RoHS
- Mark the height of the company LOGO
- Mark the height of the "CE"
- Printing for laser marking/printing content is clear ,no broken line/elect
- Seal literal reference according to the foot position in the drawing
- The words in the dotted box correspond to the list below

MATERIAL: / SURFACE: /

MAT. NO.: /
 STATUS: /
 APPD: /
 CHKD: /

DRPS-XX-XX-06A(H)

DRFT: XXXXX
 DRAWING NO.: XXXXX
 TYPE: PRODUCT DRAWING
 SCALE: 1:1
 SHEET: 1/1

REV	ECN	DESCRIPTION	DRFT	DATE	SIZE: A4	TYPE: PRODUCT DRAWING	SCALE: 1:1	SHEET
								1/1