




02P



08P

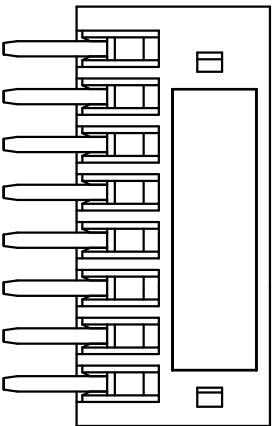


8P and 8P following no reinforcement.



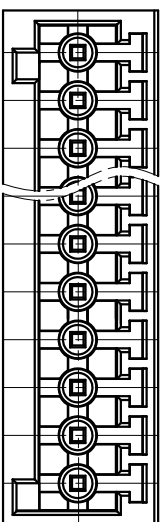


公差 (General Tolerances)(mm)		0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50			±Z

PCB LAYOUT

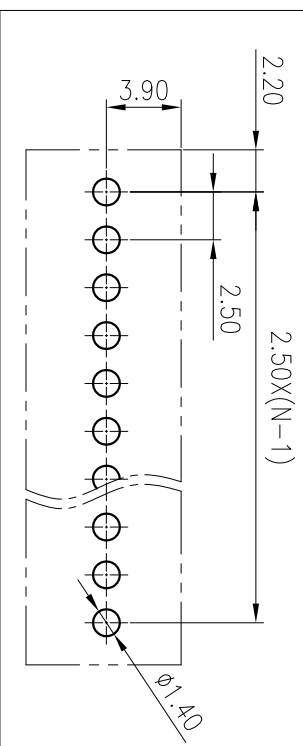

2.50X(N-1)+4.40

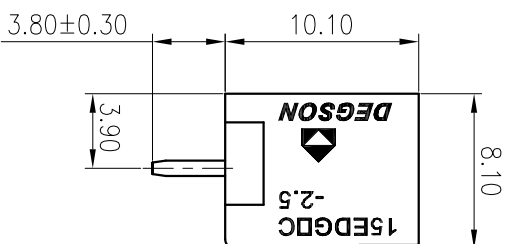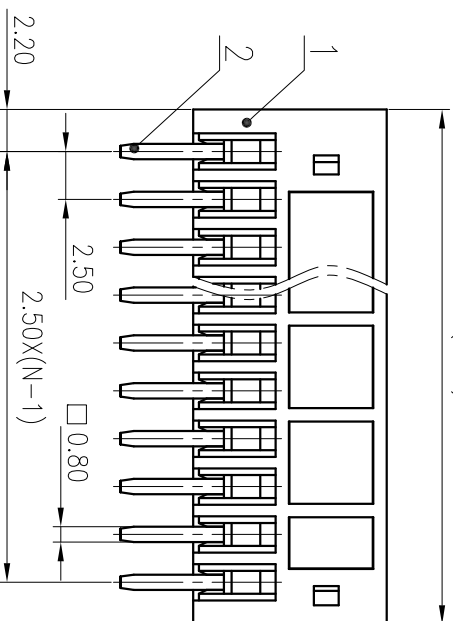

2	Pin	Copper alloy	Sn Plated	
1	Housing	PA66	UL94V-0	
ITEM	NAME OF PART	MATERIAL	NOTES	
UL 标准/UL Standard:	B	C	D	
额定电压/电流 /Rated Voltage(V)/Current(A)	150/4	/	/	
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/ Pollution Degree	III/3	III/2	II/2	
额定电压/电流 /Rated Voltage(V)/Current(A)	/	/	250/5	
额定脉冲电压 (KV)/Rate Impulse Voltage(KV)	/	/	2.5	
间距/Pitch(mm)/线数范围/Poles	2.50/N=02~12P			
使用温度范围/Operating Temperature(°C)	-40~+105			
符合RoHS环保要求/Conform to RoHS	Yes			

SURFACE:

MATERIAL:

MAT NO.:

STATUS:

APPD: Lqn CHH 2020.03.19

CHKD: Yu JZh 2020.03.19

DRFT: LIN 2008.10.20

宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: 15EDGVC-2.5-XXP-1Y-00A(H)

DRAWING NO.: 15EDGVC-2.5-C01

TYPE: CUSTOMER DRAWING

文管中心
研发专用

2020.03.19

(仅限内部使用, 对外无效)

REV	ECN	DESCRIPTION	DRFT	DATE
①		Change the drawing and tolerance table	Yu JZh	2020.03.19

REV	ECN	DESCRIPTION	DRFT	DATE
①		Change the drawing and tolerance table	Yu JZh	2020.03.19

REV

ECN

DESCRIPTION

DRFT

DATE

SIZE: A4

SIZE: A4

SIZE: A4

TYPE: CUSTOMER DRAWING

SCALE: 2.5:1 SHEET 1/1