
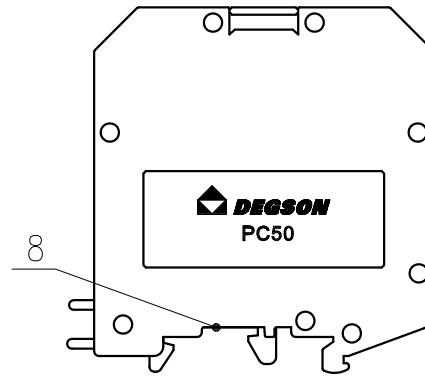
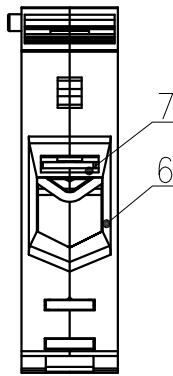
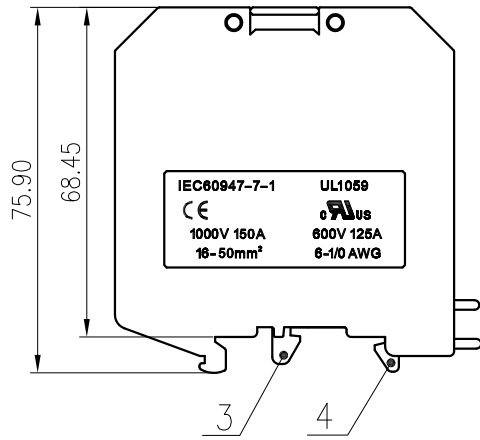


未注公差/General tolerances(mm)											0.1/10		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250		>315	>400
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

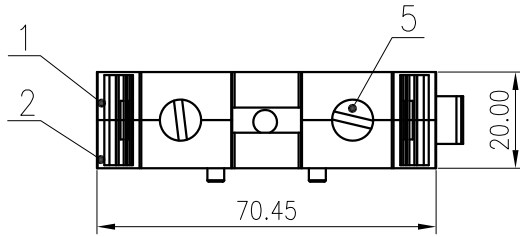

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/125	600/125	600/5
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	/	/
额定电压/电流/Rated Voltage(V)/Current(A)	1000/150	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8.0	/	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M6, 2.5/22.15		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	16~50/6~1/0		
间距/Pitch(mm)/线数范围/Poles	20.0		
剥线长度/Stripping length(mm)	22-23		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		

8	Spring	Spring steel	Ni Plated
7	Current Carrier	Copper	Sn Plated
6	Cage	Iron	Zn Plated
5	Screw	Steel	Zn Plated
4	Slip Component 2	PA66	UL94V-0
3	Slip Component 1	PA66	UL94V-0
2	Housing 2	PA66	UL94V-0
1	Housing 1	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
------	--------------	----------	-------

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

MATERIAL:	SURFACE:		
MAT NO.:	/		
STATUS:	/		
APPD: Li GL 2020.06.04	NAME: 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
CHKD: Mao J 2020.06.04	PC50-01P-1Y-00A(H)		
DRFT: ding 2016.01.15	DRAWING NO.:	PC50-C01	REV: T2
⊕	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 1:1.5 SHEET 1/1