未注公差/General tolerances(mm)														
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2°

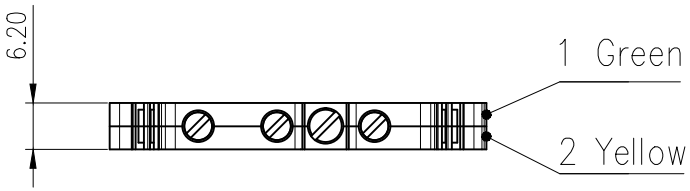

W/O Housing2

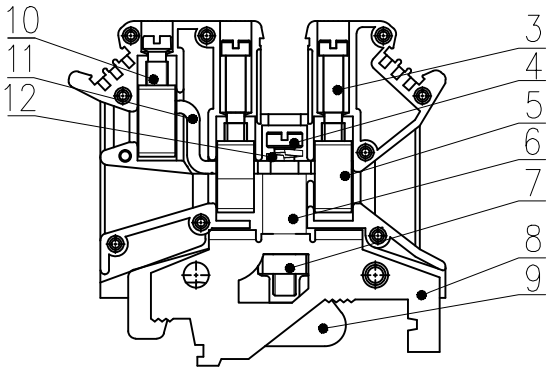



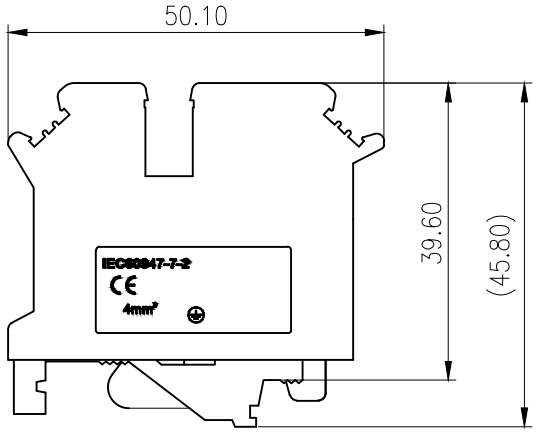

ITEM	NAME OF PART	MATERIAL	NOTES
12	Profile Gasket	Stainless steel	Ni Plated
11	Current Carrier	Copper	Sn Plated
10	Screw3	Copper Alloy	Ni Plated
9	Securing Fitting	Steel	Zn Plated
8	Slip Component	Copper Alloy	Ni Plated
7	Abnormity Nut	Copper Alloy	Ni Plated
6	Bar Copper	Copper Alloy	Ni Plated
5	Cage	Copper Alloy	Ni Plated
4	Screw2	Copper Alloy	Ni Plated
3	Screw1	Copper Alloy	Ni Plated
2	Housing2	PA66	UL94V-0
1	Housing1	PA66	UL94V-0

REV	ECN	DESCRIPTION	DRFT	DATE

	B	C	D
UL 标准/UL Standard:	/	/	/
额定电压/电流/Rated Voltage(V)/Current(A)			
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	/	/
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6.0	/	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M3, 0.5/4.43		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	0.2~4/24~14		
间距/Pitch(mm)	6.20		
剥线长度/Stripping length(mm)	8-10		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		

MATERIAL: SURFACE:

MAT NO.: /

STATUS: /

APPD: Li GL 2020.04.03

CHKD: Mao J 2020.04.03

DRFT: LXX 2017.12.25

SIZE: A4 mm (inch)

DEGSON® 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD

NAME: PC4-TW-PE-01P-1Y-00A(H)

DRAWING NO.: PC4-TW-PE-C01 REV T1

TYPE: CUSTOMER DRAWING SCALE: 1:1 SHEET 1/1