
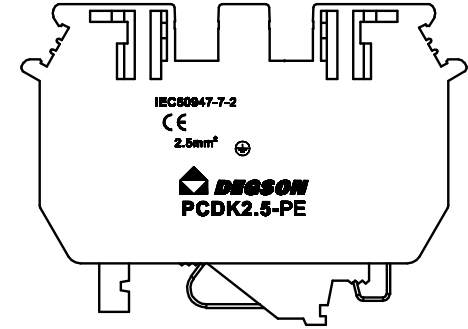
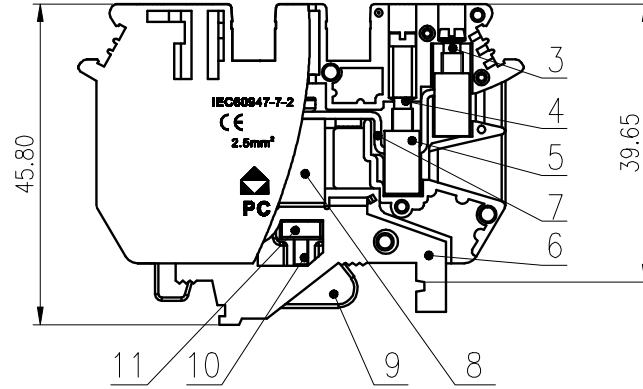


未注公差/General tolerances(mm)											0.1/10 EZ		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250		>315	>400
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

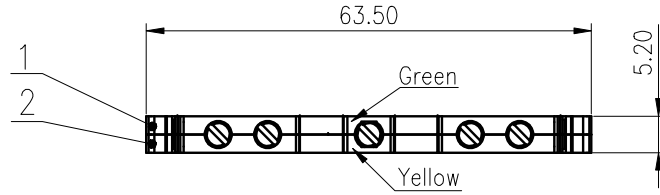

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	/	/
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6.0	/	/
螺栓扭矩/Torque Tightening(N·m/Lb.in)	M3, 0.5/4.43		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	0.2~2.5/24~12		
间距/Pitch(mm)	5.20		
剥线长度/Stripping length(mm)	7~8		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		

11	Abnormity Nut	Copper alloy	Ni Plated
10	Adjusting Bolt	Copper alloy	Ni Plated
9	Slip Component	Steel	Zn Plated
8	Bar Copper	Copper alloy	Ni Plated
7	Current Carrier	Copper	Sn Plated
6	Securing Fitting	Copper alloy	Ni Plated
5	Cage	Copper alloy	Ni Plated
4	Screw2	Copper alloy	Ni Plated
3	Screw1	Copper alloy	Ni Plated
2	Housing2	PA66	UL94V-0
1	Housing1	Copper alloy	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
------	--------------	----------	-------

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

MATERIAL:	SURFACE:		
MAT NO.: /	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
STATUS: /			
APPD: Li GL 2020.05.26	NAME: PCDK2.5-PE-01P-1Y-00A(H)		
CHKD: Mao J 2020.05.26	DRAWING NO.: PCDK 2.5-PE-C01		
DRFT:Wang LX 2020.05.26	REV	TO	
④ SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 1:1	SHEET 1/1