
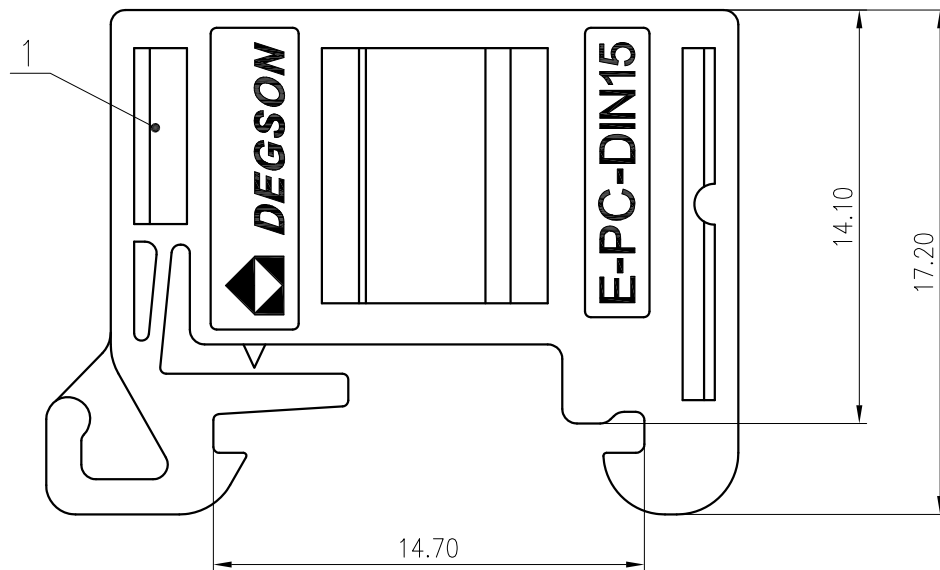


未注公差/General tolerances(mm)												0.1/10	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315		>400
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	>500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

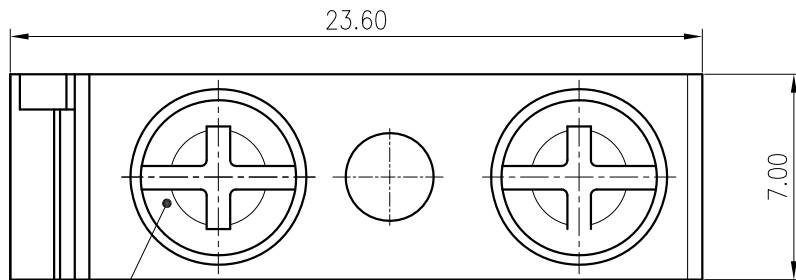


2	Screw	Steel	M3/Zn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M3, 0.5/4.43	
间距/Pitch(mm)/线数范围/Poles		14.0/01P	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

MATERIAL:		SURFACE:	
MAT NO.:	/	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/		
APPD:	Li GL 2020.06.10		
CHKD:	Mao J 2020.06.10		
DRFT:	Feng X 2020.05.09	NAME: E-PC-DIN15-01P-1Y-00A(H)	
DRAWING NO.: E-PC-DIN15-C01		REV	TO
TYPE: CUSTOMER DRAWING		SCALE: 4:1	SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE



SIZE: A4



TYPE: CUSTOMER DRAWING

SCALE: 4:1

SHEET 1/1