
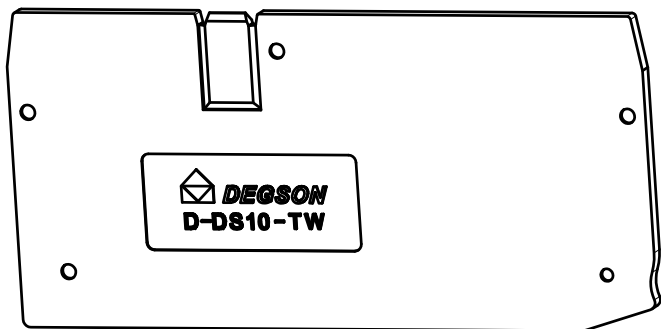
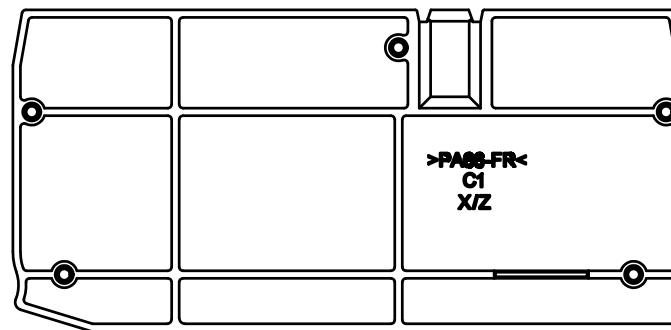

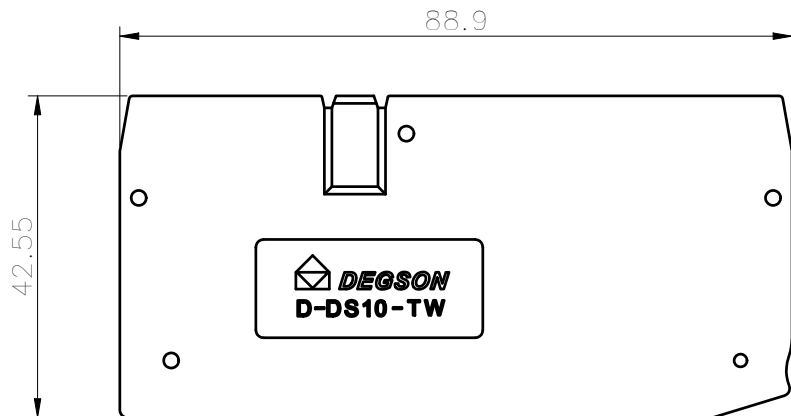


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless written authorization is granted. All rights reserved for patent, utility model or designs registrations. 非经书面明确授权, 严禁禁止转让、复制、利用、交加本文件的内容, 一经发现将追究法律责任。 实用新型和外观设计专利的所有权利。

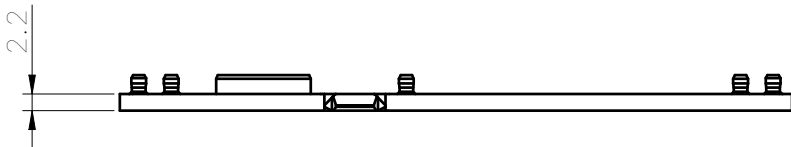

未注公差/General tolerances(mm)													
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

线数范围/Poles	01P
使用温度范围/Operating temperature(°C)	-40~+105
符合 RoHS 环保要求/Conform to RoHS	Yes

			MATERIAL: PA66		SURFACE: /		
			MAT. NO./REV: /		MAT STATUS: /		
APPD: Peng M	2022.06.07	NAME					
CHKD: Gao WG	2022.06.07	D-DS10-TW-01P-1Y-00A(H)					
DRFT: Chen KZ	2022.06.07						
DRAWING NO. /		TYPE CUSTOMER DRAWING		DRAWING STATUS /		SCALE 1:1	SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00	/	/	Chen KZ	2022.06.07